




DIMENSIONS



ACCESSORIES

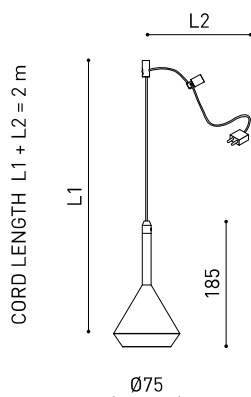

FANCY SHAPE BASE
(MANDATORY)



CORD ACCESSORY

| | |
|-----------|---|
| Name | SPIN FANCY SHAPE 2M 40° 2700K MC |
| Reference | A4200010MC |
| Color | Metallized copper - Other colours, please consult |
| RAL | Electrolytic bath |
| Category | CUSTOM SYSTEMS |

PRODUCT

| | |
|------------------------|----------------------------------|
| Type | LED |
| Gross luminous flux | 600 lm |
| Colour temperature | 2700 K - Other K, please consult |
| Chromatic stability | MacAdam Step 2 |
| Colour Rendering Index | CRI > 90 |
| Power | 6,5 W |
| Current | 700 mA |
| Efficacy | 92 lm/W |
| LED lifespan | L90B10 > 60.000h |

LIGHT SOURCE

| | |
|---------------------|-----|
| Lighting efficiency | 84% |
| Light beam angle | 40° |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|-----------------------------|---|
| Driver | Excluded |
| Power values of the system | 6,5 W |
| Dimming | No Dim / DALI - Other DIM, please consult |
| Electrical insulation class | ◆◆ |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|---------------------------|-------------------------------------|
| Sealing | IP20 |
| Wireless control | Please Consult |
| Cord length | Max. 2 m |
| Fast adjustment tensioner | Yes |
| Weight | 465 g |
| Packaged weight | 601 g |
| Packaging dimensions | 253 x 152 x 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

OTHER DATA



Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Fancy Shape is a system that enables architects to configure and distribute the space's lighting with complete freedom, creating patterns and designs using a single light source with a surface-mounted base.

POLAR DIAGRAM



CONICAL DIAGRAM



FANCY SHAPE BASE


ARKOSLIGHT®

MANDATORY FOR INSTALLATION



| FANCY SHAPE BASES | n° Lamps | ON/OFF | A417-03-11 WT NT |  DALI | A417-03-12 WT NT |  |
|------------------------------|----------|--------|----------------------|--|----------------------|---|
| FANCY SHAPE BASE 2 700 mA | 1 to 2 | | | | | Ø155 |
| 2 Equidistant Fixing Points | | | | | | |
| FANCY SHAPE BASE 6 700 mA | 3 to 6 | | | | |  |
| 6 Equidistant Fixing Points | | | | | | |
| FANCY SHAPE BASE 12 700 mA | 7 to 12 | | | | |  |
| 12 Equidistant Fixing Points | | | | | | |


220
240 V~ |  |  INCL



Fancy Shape BASE
2 LAMPS



Fancy Shape BASE
6 LAMPS

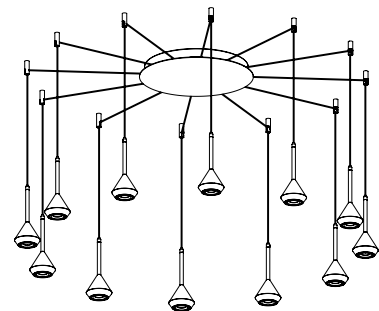

Fancy Shape BASE
12 LAMPS



NT



WT

ATTENTION

Fancy Shape Base NT: Base and Cap in Black.

Fancy Shape Base WT: Black Base and White Cap.

Luminaire Cable: Black in all finishes.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5Year
GUARANTEE*



| | |
|------------------|--------------------|
| Model | Cord Accessory |
| Reference | 02230000N |
| Colour | N ■ RAL9005 |
| Category | Accessories |

PRODUCT

Cord Accessory

02230000N**N ■ RAL9005**

Accessories

Included 1 unit x lamp

DIMENSIONAL DRAWING



| | PRODUCT |
|-----------|--------------------------|
| Model | Cord Accessory One Plane |
| Reference | 02240000N |
| Colour | N ■ RAL9005 |
| Category | Accessories |

DIMENSIONAL DRAWING





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

