




### DIMENSIONS



### ACCESSORIES

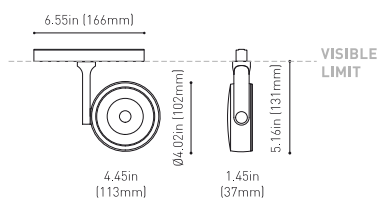

TRACK 48V OPTIONS

### AWARDS



Name	SIX L 48V SHORT UL DIM 0/10V 34° 4000K WT
Reference	U3290122WT-S
Color	Textured white
Category	Track Lights

### PRODUCT

Type	LED
Gross luminous flux	3000 Lm
Color temperature	4000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	24.5 W
Efficacy	122 Lm/W
LED lifespan	L90B10>55.000h

### LIGHT SOURCE

Lighting efficiency	90%
Delivered luminous flux	2700 Lm
Light beam angle	34°

### LIGHTING FIXTURE | PHOTOMETRIC DATA

Power values of the system	27,00 W
Dimming	0-10V

### LIGHTING FIXTURE | ELECTRICAL DATA


Environmental location	DAMP
Swivel angle	310°
Rotation angle	360°
Track type	Track 48V
Weight	1.18 lb   535 gr
Packaged weight	1.45 lb   660 gr
Packaging dimensions	8.58 x 7.68 x 2.44 in   218 x 195 x 62 mm
Materials	Aluminium - Polycarbonate

### OTHER DATA



Six 48V is a family of spotlights for low voltage tracklight applications that stands out for its lightness and elegance. Available in L, M, S, and XS, its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-. In addition, Six can be freely articulated due to its airy arm which allows the spotlight to be orientated in any direction.

POLAR DIAGRAM

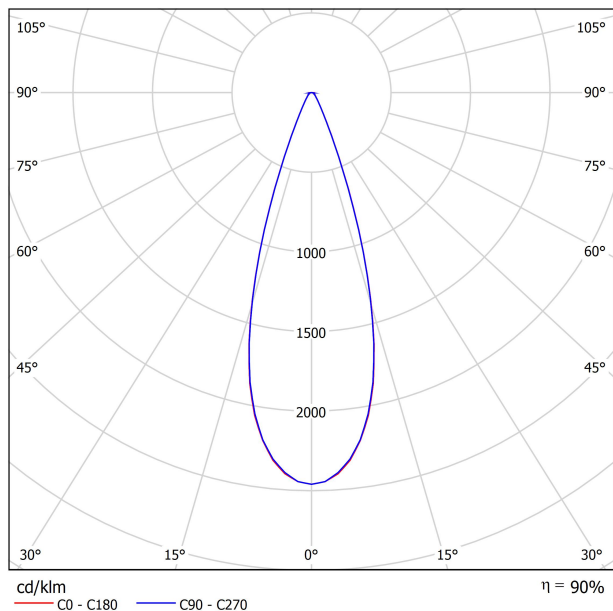

CONICAL DIAGRAM

