



### DIMENSIONS



### ACCESSORIES



TRACK 48V OPTIONS

### AWARDS



### PRODUCT

Name SIX L 48V SHORT UL DIM 0/10V 34° 4000K WTW

Reference U3290122WTW-S

Color Textured white - White track

Category Track Lights

### LIGHT SOURCE

Type LED

Gross luminous flux 3000 Lm

Color temperature 4000 K

Chromatic stability MacAdam Step 2

Color Rendering Index CRI>90

Power 24.5 W

Efficacy 122 Lm/W

LED lifespan L90B10>55.000h

### LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency 90%

Delivered luminous flux 2700 Lm

Light beam angle 34°

### LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system 27,00 W

Dimming 0-10V

### OTHER DATA

DAMP

Swivel angle 310°

Rotation angle 360°

Track type Track 48V

Weight 1.18 lb | 535 gr

Packaged weight 1.45 lb | 660 gr


Packaging dimensions 8.58x7.68x2.44 in | 218x195x62 mm

Materials Aluminium - Polycarbonate



Six 48V is a family of spotlights for low voltage tracklight applications that stands out for its lightness and elegance. Available in L, M, S, and XS, its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-. In addition, Six can be freely articulated due to its airy arm which allows the spotlight to be orientated in any direction.

POLAR DIAGRAM

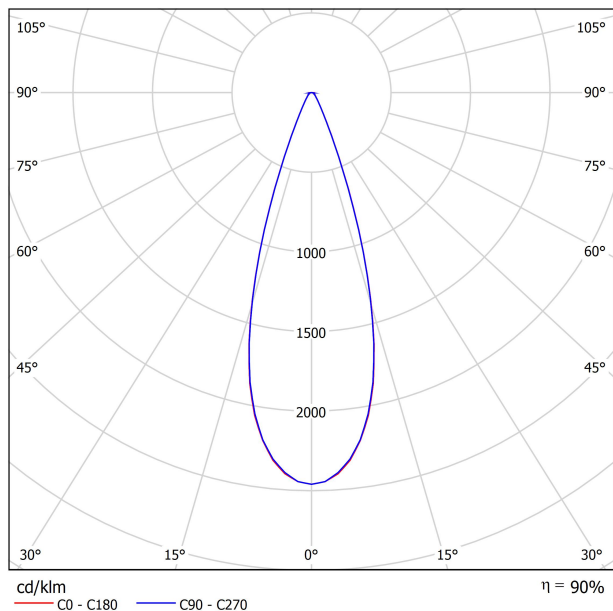

CONICAL DIAGRAM

