

# Black Foster Suspension

# ARKOSLIGHT



## DIMENSIONS



## AWARDS



## PRODUCT

Name	BLACK FOSTER SUSP 1200 UL FLOOD 4000K WT
Reference	U3211012WT
Color	Textured white
Category	Suspension

## LIGHT SOURCE

Type	LED
Gross luminous flux	2500 Lm
Color temperature	4000 K
Chromatic stability	MacAdam Step 3
Color Rendering Index	CRI>90
Power	21 W
Current	700 mA
Efficacy	119 Lm/W
LED lifespan	L90B10>102.000h

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	92%
Delivered luminous flux	2300 Lm
Light beam angle	38°

## LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included: ERP-PSB series or similar
Power values of the system	24,00 W
Frequency	50/60 Hz
Dimming	0-10V / TRIAC/ELV dimming only at 120V

## OTHER DATA


Environmental location	DAMP
Junction box cover	Included. For octagonal Junction box
Junction box cover color	Textured white. Other finishing, please consult
Junction box cover measurements	Ø5.51 in   Ø140 mm
Cord Length	MAX. 10 ft   MAX. 3.05 m
Fast adjustment tensioner	Yes
Weight	7.18 lb   3255 gr
Packaged weight	9.85 lb   4470 gr
Packaging dimensions	Ø6.10 x 50.00 in   Ø155 x 1270 mm
Materials	Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate




Black Foster Suspension is the product that transfers the claimed effect "The Invisible Black" to a linear suspended system. It is composed by a series of modules which combine light emissions with dark segments. Nevertheless, whether it is On or Off, Black Foster always preserves the aesthetic of a perfect dark line.



## POLAR DIAGRAM

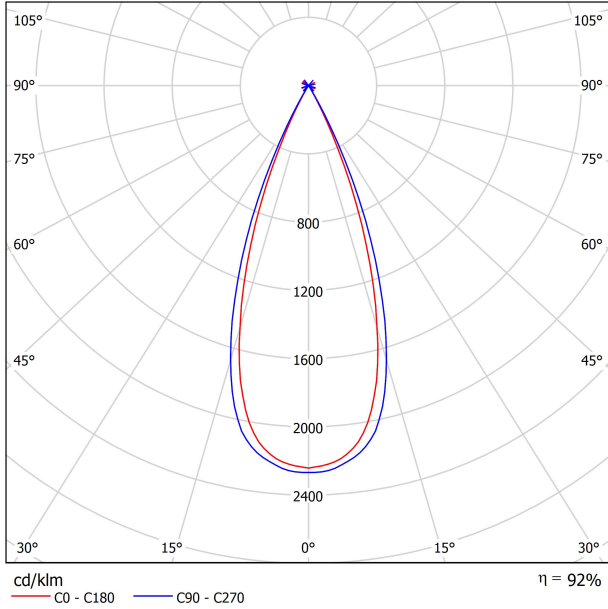

## CONICAL DIAGRAM

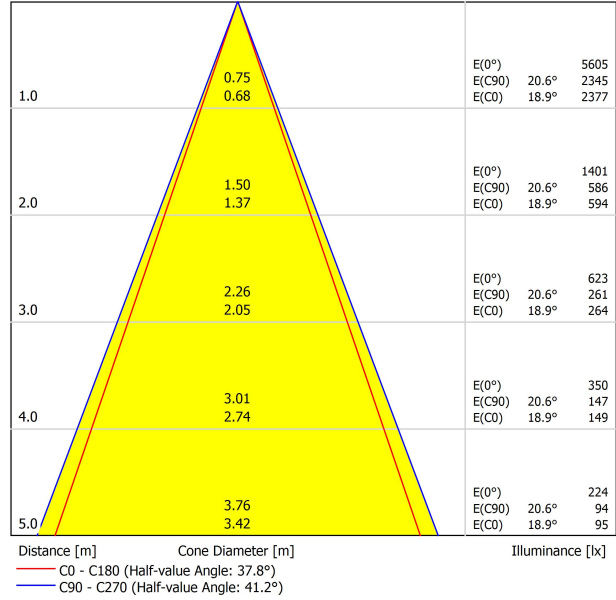

## UGR

Glare Evaluation According to UGR																
Room Size		70	70	50	50	30	70	70	50	50	30	30				
X		50	30	50	30	30	50	30	50	30	30	30				
Y		20	20	20	20	20	20	20	20	20	20	20				
Viewing direction at right angles to lamp axis		Viewing direction parallel to lamp axis						Viewing direction parallel to lamp axis								
2H	2H	-23.7	-23.1	-23.5	-22.9	-22.7	-20.8	-20.1	-20.5	-19.9	-19.7	-15.0	-14.4	-14.7	-14.2	-13.9
3H	3H	-12.0	-11.4	-11.7	-11.2	-11.0	-13.3	-12.7	-13.0	-12.5	-12.2	-8.1	-7.6	-7.7	-7.3	-7.0
4H	4H	-11.5	-11.0	-11.2	-10.7	-10.5	-6.4	-5.9	-6.0	-5.6	-5.3	-15.9	-15.4	-15.6	-15.1	-14.9
6H	6H	-8.4	-7.9	-8.1	-7.7	-7.4	-12.6	-12.1	-12.2	-11.8	-11.5	-11.6	-11.2	-11.2	-10.8	-10.5
8H	8H	-8.4	-7.9	-8.1	-7.6	-7.3	-7.0	-6.7	-6.6	-6.3	-6.0	-5.8	-5.5	-5.4	-5.1	-4.7
12H	12H	-7.0	-6.6	-6.7	-6.3	-6.0	-4.4	-4.2	-4.0	-3.8	-3.4	-4.9	-4.7	-4.5	-4.3	-4.2
4H	2H	-16.4	-15.9	-16.1	-15.6	-15.4	-10.7	-10.5	-10.3	-10.1	-9.7	-8.5	-8.2	-8.1	-7.8	-7.4
3H	3H	-11.3	-10.9	-11.0	-10.6	-10.3	-6.0	-5.8	-5.6	-5.4	-4.9	-4.8	-4.6	-4.4	-4.2	-3.7
4H	4H	-8.6	-8.2	-8.2	-7.9	-7.5	-4.9	-4.8	-4.5	-4.3	-3.8	-4.5	-4.3	-4.0	-3.9	-3.4
6H	6H	-6.2	-5.8	-5.8	-5.5	-5.1	-3.7	-3.6	-3.2	-3.1	-2.6	-3.5	-3.3	-3.0	-2.9	-2.4
8H	8H	-6.0	-5.8	-5.6	-5.4	-5.0	-9.8	-9.5	-9.4	-9.2	-8.7	-6.0	-5.8	-5.6	-5.4	-4.9
12H	12H	-4.9	-4.7	-4.5	-4.3	-3.8	-5.7	-5.5	-5.2	-5.1	-4.6	-4.3	-4.2	-3.8	-3.7	-3.2
8H	4H	-8.5	-8.2	-8.1	-7.8	-7.4	-4.7	-4.5	-4.2	-4.1	-3.6	-4.7	-4.5	-4.2	-4.1	-3.6
6H	6H	-4.8	-4.6	-4.4	-4.2	-3.7	Variation of the observer position for the luminaire distances S									
8H	8H	-4.5	-4.3	-4.0	-3.9	-3.4	S = 1.0H	+2.4 / -1.3			+3.7 / -1.4					
12H	12H	-3.5	-3.3	-3.0	-2.9	-2.4	S = 1.5H	+4.3 / -1.5			+6.0 / -1.8					
							S = 2.0H	+6.3 / -4.1			+8.0 / -2.2					
Standard table		BK07						---								
Correction Summand		-24.4						---								
Corrected Glare Indices referring to 2500lm Total Luminous Flux																