



### DIMENSIONS



### ACCESSORIES



TRACK 48V OPTIONS

### AWARDS



|           |                                       |
|-----------|---------------------------------------|
| Name      | SIX XS 48V UL DIM 0/10V 17° 2700K WTW |
| Reference | U3350110WTW                           |
| Color     | Textured white - White track          |
| Category  | Track Lights                          |

|                       |                |
|-----------------------|----------------|
| Type                  | LED            |
| Gross luminous flux   | 470 Lm         |
| Color temperature     | 2700 K         |
| Chromatic stability   | MacAdam Step 2 |
| Color Rendering Index | CRI>90         |
| Power                 | 4.5 W          |
| Efficacy              | 104 Lm/W       |
| LED lifespan          | L90B10>55.000h |

|                         |        |
|-------------------------|--------|
| Lighting efficiency     | 90%    |
| Delivered luminous flux | 423 Lm |
| Light beam angle        | 17°    |

|                            |        |
|----------------------------|--------|
| Power values of the system | 5,00 W |
| Dimming                    | 0-10V  |

|                        |                                   |
|------------------------|-----------------------------------|
| Environmental location | DAMP                              |
| Swivel angle           | 310°                              |
| Rotation angle         | 360°                              |
| Track type             | Track 48V                         |
| Weight                 | 0.25 lb   112 gr                  |
| Packaged weight        | 0.35 lb   160 gr                  |
| Packaging dimensions   | 7.48x5.71x0.94 in   190x145x24 mm |
| Materials              | Aluminium - Polycarbonate         |

### PRODUCT

### LIGHT SOURCE

### LIGHTING FIXTURE | PHOTOMETRIC DATA

### LIGHTING FIXTURE | ELECTRICAL DATA

### OTHER DATA




Six 48V is a family of spotlights for low voltage tracklight applications that stands out for its lightness and elegance. Available in L, M, S, and XS, its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-. In addition, Six can be freely articulated due to its airy arm which allows the spotlight to be orientated in any direction.

POLAR DIAGRAM



CONICAL DIAGRAM

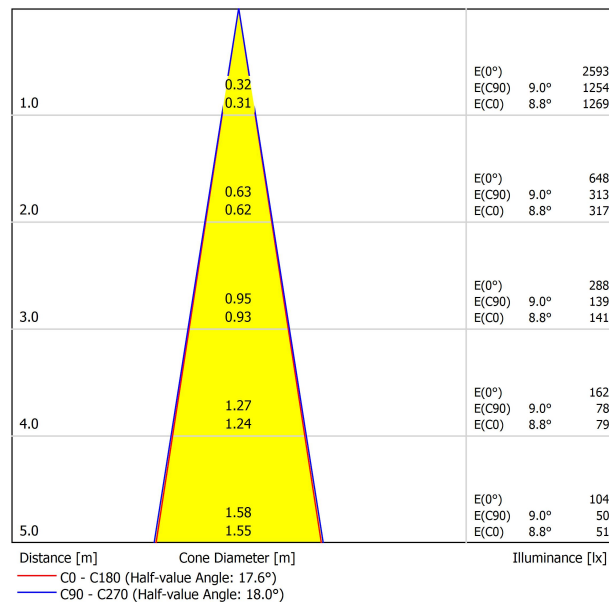

# Track 48V

# ARKOSLIGHT

48V track lighting systems are low-voltage lighting solutions based on electrified tracks. The track serves both as a physical structure and as a power carrier, allowing light modules to be placed and repositioned as needed, offering flexibility, safety, and energy efficiency. Ideal for projects that demand minimalist design, high performance, and adaptability. To configure your 48V system, you'll need to combine the following components:

1. Tracks - Available in surface, trimless, surface short, suspended (using suspension accessories with the surface track), and indirect light versions. They form the structural and electrical base of the system.
2. Connectors & Power Supply - Ensure electrical continuity between track sections and provide the 48V power input.
3. Accessories - Including end caps, joiners, mounting elements, and optional installation accessories to complete and secure the setup.



## Track Options

Choose the track version required for your project configuration.

### Surface

|                                  |                       |
|----------------------------------|-----------------------|
| TRACK 48V SURFACE 3.28ft (1m) UL | U338-11-00-   NT   WT |
| TRACK 48V SURFACE 6.56ft (2m) UL | U338-12-00-   NT   WT |



|   |                       |
|---|-----------------------|
| TRACK 48V SURFACE Corner 90° One Plane UL | U338-14-00-   NT   WT |
| TRACK 48V SURFACE T-Joint UL              | U338-15-00-   NT      |
| TRACK 48V SURFACE X-Joint UL              | U338-16-00-   NT      |



Corner 90° One Plane UL

T-Joint UL

X-Joint UL



Straight joiners included  
\*Electrical connections not included



### Trimless

|                                   |                      |
|-----------------------------------|----------------------|
| TRACK 48V TRIMLESS 3.28ft (1m) UL | U338-01-00-   N   WT |
| TRACK 48V TRIMLESS 6.56ft (2m) UL | U338-02-00-   N   WT |

Plasterboard ceiling, mandatory thickness 0.50in (12.5mm). Recommended for installations where the profile can be installed before the false plasterboard ceiling.



|   |                      |
|---|----------------------|
| TRACK 48V TRIMLESS Corner 90° One Plane UL  | U338-06-00-   N   WT |
| TRACK 48V TRIMLESS Corner 90° Two Planes UL | U338-07-00-   N   WT |

Plasterboard ceiling, mandatory thickness 0.50in (12.5mm). Recommended for installations where the profile can be installed before the false plasterboard ceiling.



Corner 90° One Plane UL

Corner 90° Two Planes UL



\*Electrical connection not included



\*Electrical connection not included

TRIMLESS INSTALLATION GUIDE  
<https://youtu.be/tgGsQdaYe-w>



COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

\*Electrical connections are not included. Please choose the required components from the Connectors section.

## Complementary track accessories

Use end caps, joiners, and gap covers to connect, close, and cleanly finish your track setup.

### Surface

End 48V UL  
U338-00-06- | NT | WT |



End Feed 48V UL  
U338-00-07- | NT | WT |



Surface Straight Joiner 48V UL  
U338-00-11



### Trimless

Trimless Straight Joiners (2 units) 48V UL  
U338-00-05- | N | WT |



### For all tracks

Cover Gap 3,28 ft (1m) 48V UL U338-00-30- | N |



## Connector options

Connectors are required to provide electrical continuity between tracks, ensuring an uninterrupted 48V flow.

Live-End Connector 48V UL  
U338-00-01- | N | W |



Central Connector 48V UL  
U338-00-02- | N | W |



T-Joint Connector 48V UL  
U450-00-07- | N |



Wireless Control 48V UL  
U434-01-31- | N | W | Casambi



Corner 90° Connector One Plane 48V UL  
U338-00-24- | N | W |


\*Not suitable for trimless version



L-Joint Connector 48V UL  
U338-00-12- | N | W |



X-Joint Connector 48V UL  
U450-00-08- | N |

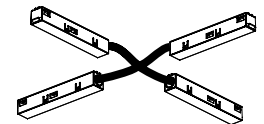

COLOUR | N ■ RAL 9005 | W □ RAL 9016 |

## Power Supply Options

Select the appropriate power feed to deliver 48V to the system based on your track layout and installation type.

### For all tracks

|  | P                 | V   | D   |
|--|-------------------|-----|---|
| <b>CONSTANT VOLTAGE LED POWER SUPPLY</b> | <b>U100-00-78</b> | 96W | 48V   |
|  |                   |     | 8.16 x 2.97 x 1.30 in<br>207 x 75.4 x 33 mm |
| 120 & 277 V   50/60 Hz                   |                   |     |   |

UL DROP VOLTAGE TABLE

| POWER | CABLE SECTION | CABLE LENGTH  |                |                |                |
|-------|---------------|---------------|----------------|----------------|----------------|
|       |               | 16.40ft<br>5m | 32.80ft<br>10m | 65.62ft<br>20m | 98.43ft<br>30m |
| 96W   | AWG16         | 164ft         | 164ft          | 131.32ft       | 82ft           |
|       |               | 50m           | 50m            | 40m            | 25m            |

## Other accessories

### Alternative suspension installation

For a suspended configuration, use surface components together with the following accessories:

**Suspension Kit (2 units) 48V UL**

U338-00-15- | NT | WT |



**Suspension feed Kit (2 units) 48V UL**

U338-00-17- | N | W | DIM



\*for remote power supply

### Trimless mounting accessories

These accessories offer different options for installing trimless track systems according to ceiling type and project needs.

**Trimless Plaster Installation Guard 3.28ft (1m) 48V UL**

U338-00-21

Recommended for installation



**Fixing Template for Track 48V Trimless UL**

U338-00-31

Recommended for installation



**Trimless T-Bracket 48V UL**

U338-00-03



**Trimless Long T-Bracket 48V UL**

A338-00-04



**Trimless Clamp for M6 ROD 48V UL**

U338-00-09

\*See accessories quantities



**Trimless Track Clamp 48V UL**

U338-00-10

\*See accessories quantities



**Trimless Suspension Kit 48V UL**

U338-00-08

\*See accessories quantities



#### SUGGESTED MOUNTING ACCESSORIES QUANTITIES

3.28 ft (1000 mm) - 2 Pcs  
6.56 ft (2000 mm) - 3 Pcs

TRIMLESS INSTALLATION GUIDE  
<https://youtu.be/tgGsQdaYe-w>



COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 | W □ RAL 9016 |