



DIMENSIONS



ACCESSORIES



TRACK 48V OPTIONS

AWARDS



| | |
|-----------|---|
| Name | SIX XS 48V SHORT UL DIM 0/10V 23° 3000K NTW |
| Reference | U3350121NTW-S |
| Color | Textured black - White track |
| Category | Track Lights |

PRODUCT

| | |
|-----------------------|----------------|
| Type | LED |
| Gross luminous flux | 500 Lm |
| Color temperature | 3000 K |
| Chromatic stability | MacAdam Step 2 |
| Color Rendering Index | CRI>90 |
| Power | 4.5 W |
| Efficacy | 111 Lm/W |
| LED lifespan | L90B10>55.000h |

LIGHT SOURCE

| | |
|-------------------------|--------|
| Lighting efficiency | 86% |
| Delivered luminous flux | 430 Lm |
| Light beam angle | 23° |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|----------------------------|--------|
| Power values of the system | 5,00 W |
| Dimming | 0-10V |

LIGHTING FIXTURE | ELECTRICAL DATA


| | |
|------------------------|-----------------------------------|
| Environmental location | DAMP |
| Swivel angle | 310° |
| Rotation angle | 360° |
| Track type | Track 48V |
| Weight | 0.25 lb 112 gr |
| Packaged weight | 0.35 lb 160 gr |
| Packaging dimensions | 7.48x5.71x0.94 in 190x145x24 mm |
| Materials | Aluminium - Polycarbonate |

OTHER DATA



Six 48V is a family of spotlights for low voltage tracklight applications that stands out for its lightness and elegance. Available in L, M, S, and XS, its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-. In addition, Six can be freely articulated due to its airy arm which allows the spotlight to be orientated in any direction.

POLAR DIAGRAM

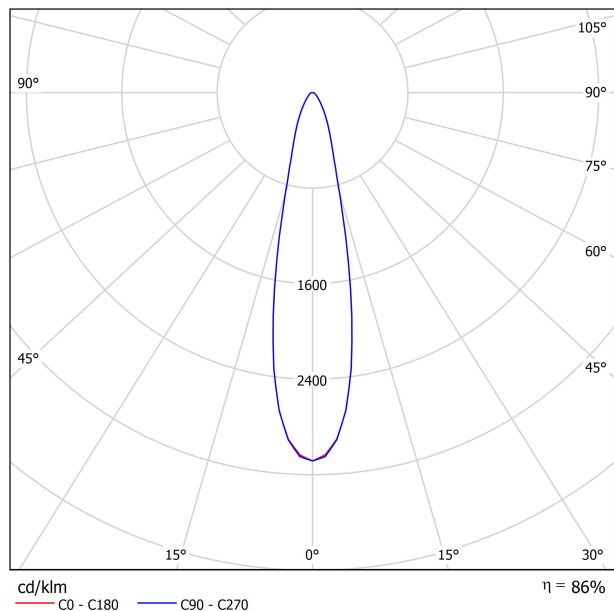

CONICAL DIAGRAM

