



DIMENSIONS



ACCESORIES



TRACK 48V OPTIONS

AWARDS



| | |
|-----------|--|
| Name | SIX M 48V SHORT UL DIM DALI 19° 3000K WT |
| Reference | U3300211WT-S |
| Color | Textured white |
| Category | Track Lights |

| | |
|-----------------------|----------------|
| Type | LED |
| Gross luminous flux | 2130 Lm |
| Color temperature | 3000 K |
| Chromatic stability | MacAdam Step 2 |
| Color Rendering Index | CRI>90 |
| Power | 17 W |
| Efficacy | 125 Lm/W |
| LED lifespan | L90B10>55.000h |

| | |
|-------------------------|---------|
| Lighting efficiency | 93% |
| Delivered luminous flux | 1981 Lm |
| Light beam angle | 19° |

| | |
|----------------------------|---------|
| Power values of the system | 18,00 W |
| Dimming | DALI |

| | |
|------------------------|---|
| Environmental location | DAMP |
| Swivel angle | 310° |
| Rotation angle | 360° |
| Track type | Track 48V |
| Weight | 0.67 lb 303 gr |
| Packaged weight | 0.83 lb 375 gr |
| Packaging dimensions | 7.40 x 6.50 x 2.09 in 188 x 165 x 53 mm |
| Materials | Aluminium - Polycarbonate |

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA



Six 48V is a family of spotlights for low voltage tracklight applications that stands out for its lightness and elegance. Available in L, M, S, and XS, its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-. In addition, Six can be freely articulated due to its airy arm which allows the spotlight to be orientated in any direction.

POLAR DIAGRAM

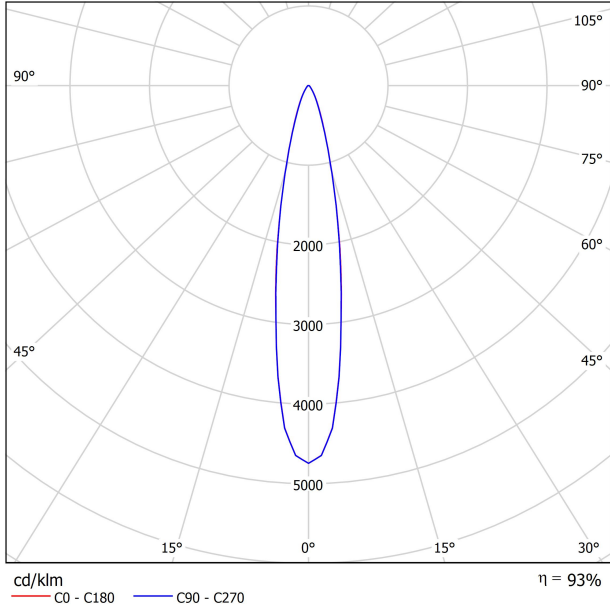

CONICAL DIAGRAM

