




DIMENSIONS



PRODUCT

Name	BLACK FOSTER SURFACE REMOTE 3 UL FLOOD 2700K WTW
Reference	U4803000WTW
Color	Textured white
Category	Surface

LIGHT SOURCE

Type	LED
Gross luminous flux	Depending on Mounting Accessories Lm
Color temperature	2700 K
Chromatic stability	MacAdam Step 3
Color Rendering Index	CRI>90
Power	Depending on Mounting Accessories W
Current	Depending on Mounting Accessories mA
LED lifespan	L90B10>102.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	92%
Delivered luminous flux	0 Lm
Light beam angle	38°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Requires remote driver
Power values of the system	W
Frequency	Depending on Mounting Accessories
Dimming	Depending on Mounting Accessories

OTHER DATA

Environmental location	DAMP
Weight	0.540 lb 245 gr
Packaged weight	0.661 lb 300 gr
Packaging dimensions	10.2 x 2.8 x 1.8 in 260 x 73 x 46 mm
Materials	Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate




An unostentatious feature in the space. This is how the new Black Foster Surface Remote version reveals its compact and essential lighting fixture. The commitment to the use of a remote driver enables minimising its profile to the extent necessary to integrate its invisible light optical system.



POLAR DIAGRAM



CONICAL DIAGRAM

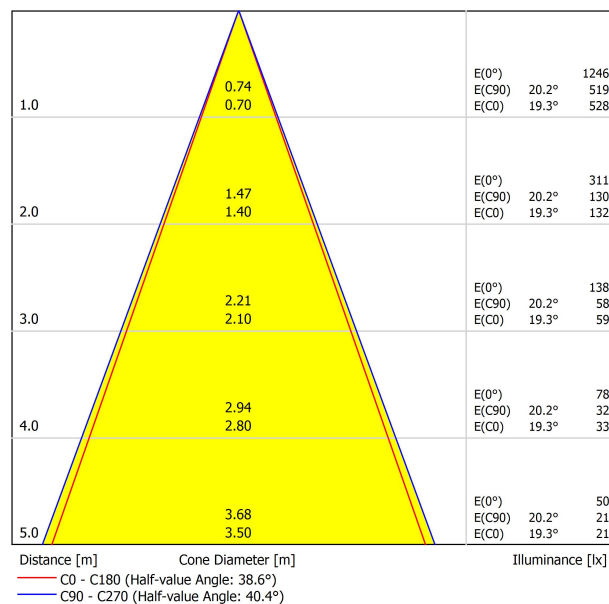

UGR

Glare Evaluation According to UGR											
p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-11.9	-11.3	-11.7	-11.1	-10.9	-12.0	-11.4	-11.7	-11.2	-11.0
	3H	-7.0	-6.4	-6.7	-6.2	-5.9	-6.0	-5.5	-5.8	-5.2	-5.0
	4H	-3.9	-3.4	-3.6	-3.1	-2.9	-2.7	-2.2	-2.4	-1.9	-1.6
	6H	-0.5	-0.0	-0.2	0.2	0.5	0.9	1.4	1.2	1.7	2.0
	8H	1.2	1.7	1.6	2.0	2.3	2.7	3.2	3.0	3.5	3.8
	12H	3.2	3.6	3.5	3.9	4.2	4.6	5.1	5.0	5.4	5.7
4H	2H	-10.3	-9.7	-10.0	-9.5	-9.2	-10.3	-9.8	-10.0	-9.5	-9.3
	3H	-5.2	-4.7	-4.8	-4.4	-4.1	-4.5	-4.0	-4.1	-3.7	-3.4
	4H	-2.1	-1.7	-1.8	-1.4	-1.1	-1.1	-0.7	-0.8	-0.4	-0.1
	6H	1.3	1.7	1.7	2.0	2.4	2.6	2.9	3.0	3.3	3.6
	8H	3.2	3.4	3.6	3.8	4.2	4.5	4.8	4.9	5.1	5.5
	12H	5.2	5.4	5.6	5.8	6.2	6.5	6.8	7.0	7.2	7.6
8H	4H	-0.9	-0.6	-0.5	-0.2	0.2	-0.2	0.1	0.3	0.5	0.9
	6H	2.7	2.9	3.2	3.4	3.8	3.7	3.9	4.2	4.3	4.8
	8H	4.7	4.9	5.2	5.3	5.8	5.8	6.0	6.2	6.4	6.9
	12H	6.9	7.0	7.4	7.5	8.0	8.0	8.2	8.5	8.6	9.1
12H	4H	-0.3	-0.1	0.1	0.3	0.7	0.2	0.5	0.6	0.9	1.3
	6H	3.3	3.5	3.7	3.9	4.4	4.1	4.3	4.6	4.7	5.2
	8H	5.3	5.5	5.8	5.9	6.4	6.3	6.4	6.7	6.9	7.4
Variation of the observer position for the luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+0.7 / -0.3 +1.4 / -0.5 +2.4 / -0.8					+1.3 / -0.4 +2.7 / -0.7 +4.2 / -1.0				
Standard table		---					---				
Correction		---					---				
Summand		---					---				
Corrected Glare Indices referring to 570lm Total Luminous Flux											