




## DIMENSIONS

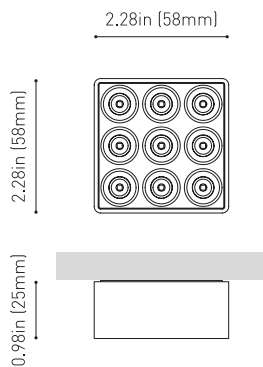

Name	BLACK FOSTER MICRO SURFACE 3X3 UL 4000K WT
Reference	U4594002WT
Color	Textured white
Category	Surface

## PRODUCT

Type	LED
Gross luminous flux	Depending on Mounting Accessories Lm
Color temperature	4000 K
Chromatic stability	MacAdam Step 3
Color Rendering Index	CRI>90
Power	Depending on Mounting Accessories W
Current	Depending on Mounting Accessories mA
LED lifespan	L90B10>60.000h

## LIGHT SOURCE

Lighting efficiency	87%
Delivered luminous flux	0 Lm
Light beam angle	37°

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Driver	Requires remote driver
Power values of the system	W
Frequency	Depending on Mounting Accessories
Dimming	Depending on Mounting Accessories

## LIGHTING FIXTURE | ELECTRICAL DATA


Environmental location	DAMP
Weight	0.22 lb   100 gr
Packaged weight	0.31 lb   141 gr
Packaging dimensions	4.8 x 3.34 x 1.22 in   122 x 85 x 31 mm
Materials	Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate

## OTHER DATA




Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence. The downlight retains high levels of shielding, taking lighting comfort to another level as regards miniaturisation.

## POLAR DIAGRAM

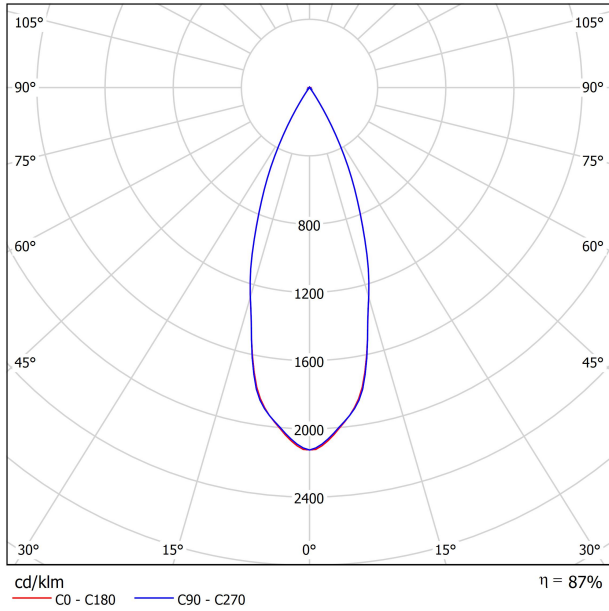

## CONICAL DIAGRAM

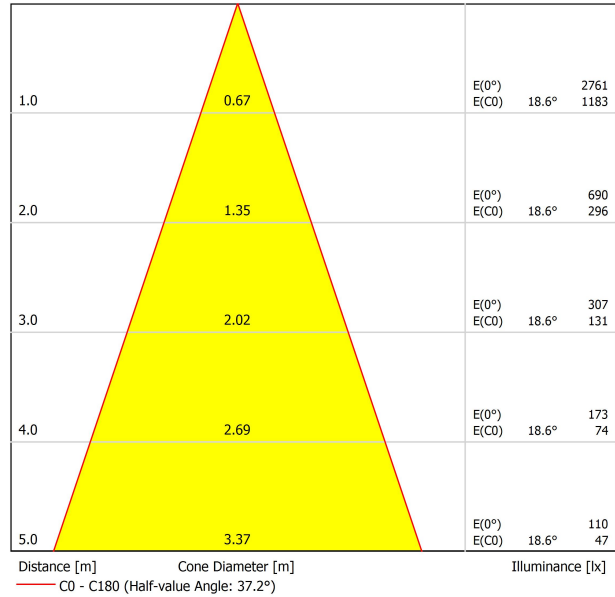

## UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	30
ρ Walls	50	30	50	30	30	50	30	50	30	30	30
ρ Floor	20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-3.4	-2.8	-3.2	-2.6	-2.4	-3.1	-2.5	-2.9	-2.3	-2.1
	3H	-0.5	0.0	-0.3	0.3	0.5	-0.1	0.5	0.2	0.7	0.9
	4H	1.4	1.9	1.7	2.2	2.4	1.7	2.2	2.0	2.5	2.8
	6H	3.2	3.7	3.5	3.9	4.2	3.6	4.1	3.9	4.4	4.6
	8H	4.4	4.9	4.8	5.2	5.5	4.8	5.3	5.1	5.6	5.9
4H	12H	5.7	6.2	6.1	6.5	6.8	6.2	6.7	6.6	7.0	7.3
	2H	-2.6	-2.1	-2.3	-1.8	-1.6	-2.4	-1.8	-2.1	-1.6	-1.3
	3H	0.7	1.2	1.0	1.5	1.8	0.9	1.4	1.3	1.7	2.0
	4H	3.0	3.4	3.4	3.7	4.1	3.1	3.5	3.5	3.8	4.2
	6H	4.9	5.2	5.3	5.6	6.0	5.2	5.5	5.6	5.9	6.3
8H	8H	6.3	6.5	6.7	6.9	7.3	6.5	6.8	6.9	7.2	7.6
	12H	7.7	7.9	8.1	8.3	8.7	8.1	8.3	8.5	8.7	9.2
	4H	3.8	4.0	4.2	4.4	4.8	3.9	4.1	4.3	4.5	4.9
	6H	6.0	6.2	6.4	6.6	7.1	6.3	6.5	6.7	6.9	7.3
	8H	7.5	7.7	8.0	8.1	8.6	7.7	7.9	8.2	8.3	8.8
12H	12H	9.1	9.3	9.6	9.7	10.2	9.6	9.7	10.0	10.2	10.7
	4H	4.0	4.2	4.4	4.6	5.1	4.1	4.3	4.5	4.7	5.1
	6H	6.4	6.5	6.8	7.0	7.4	6.6	6.8	7.1	7.2	7.7
	8H	8.0	8.1	8.5	8.6	9.1	8.2	8.3	8.7	8.8	9.3
	Variation of the observer position for the luminaire distances S										
S = 1.0H	+5.5 / -3.3					+5.4 / -3.1					
S = 1.5H	+8.2 / -3.6					+8.1 / -3.5					
S = 2.0H	+10.3 / -4.1					+10.2 / -3.9					
Standard table	BK02					BK02					
Correction Summand	-7.5					-7.4					
Corrected Glare Indices referring to 1300lm Total Luminous Flux											