




DIMENSIONS



ACCESORIES

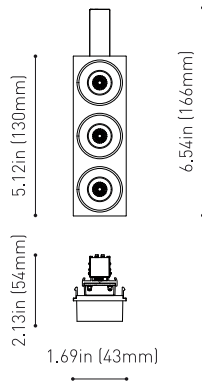

BLACK FOSTER CUSTOM
ACCESSORIES

| | |
|-----------|----------------|
| Reference | U4533121N |
| Color | Matt black |
| Category | Custom Systems |

| | |
|-----------------------|-----------------|
| Type | LED |
| Gross luminous flux | 630 Lm |
| Color temperature | 3000 K |
| Chromatic stability | MacAdam Step 3 |
| Color Rendering Index | CRI>90 |
| Power | 6.3 W |
| Current | 700 mA |
| Efficacy | 100 Lm/W |
| LED lifespan | L90B10>102.000h |

| | |
|-------------------------|--------|
| Lighting efficiency | 90% |
| Delivered luminous flux | 567 Lm |
| Light beam angle | 19° |

| | |
|----------------------------|----------|
| Driver | Included |
| Power values of the system | 8,40 W |
| Dimming | DALI |

| | |
|------------------------|---|
| Environmental location | DAMP |
| Track type | Black Foster Custom Surface Track |
| Weight | 0.24 lb 110 gr |
| Packaged weight | 0.39 lb 177 gr |
| Packaging dimensions | 9.72 x 4.41 x 1.89 in 247 x 112 x 48 mm |
| Materials | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA

LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA




Black Foster is the lighting fixture that transfers the applauded "Invisible Black" effect to a linear system. Black Foster is composed of a series of combinable modules enabling the alternation of segments with light emission and without light emission. However, whether it is ON or OFF, this luminaire always keeps the aesthetics of a perfect dark line. To the observer, it is impossible to distinguish between Black Foster parts that emit light from those that don't. Black Foster's modularity provides a wide range of different combinations, allowing to set up the light emission location as many times as needed, and adapting itself to the requirements of each project in particular.

POLAR DIAGRAM



CONICAL DIAGRAM

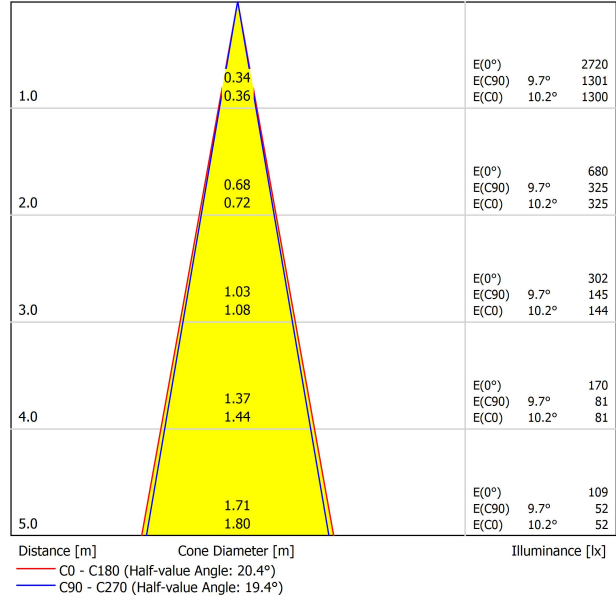

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | |
|--|-------------|--|------|------|------|-------------|---|------|------|------|------|
| ρ Ceiling | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | |
| ρ Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | |
| ρ Floor | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | 5.5 | 6.1 | 5.7 | 6.3 | 6.5 | 5.5 | 6.2 | 5.8 | 6.4 | 6.6 |
| | 3H | 9.0 | 9.6 | 9.3 | 9.9 | 10.1 | 9.1 | 9.7 | 9.4 | 9.9 | 10.2 |
| | 4H | 10.9 | 11.5 | 11.2 | 11.7 | 12.0 | 11.0 | 11.6 | 11.3 | 11.8 | 12.1 |
| | 6H | 13.0 | 13.5 | 13.3 | 13.8 | 14.1 | 13.0 | 13.6 | 13.3 | 13.8 | 14.1 |
| | 8H | 14.2 | 14.7 | 14.6 | 15.0 | 15.3 | 14.3 | 14.8 | 14.6 | 15.1 | 15.4 |
| | 12H | 15.6 | 16.1 | 15.9 | 16.4 | 16.7 | 15.7 | 16.2 | 16.0 | 16.5 | 16.8 |
| 4H | 2H | 6.5 | 7.1 | 6.8 | 7.3 | 7.6 | 6.6 | 7.1 | 6.9 | 7.4 | 7.7 |
| | 3H | 10.3 | 10.8 | 10.7 | 11.1 | 11.4 | 10.4 | 10.9 | 10.7 | 11.2 | 11.5 |
| | 4H | 12.4 | 12.8 | 12.7 | 13.1 | 13.5 | 12.5 | 12.9 | 12.9 | 13.3 | 13.6 |
| | 6H | 14.6 | 15.0 | 15.0 | 15.4 | 15.7 | 14.7 | 15.0 | 15.1 | 15.4 | 15.8 |
| | 8H | 16.0 | 16.3 | 16.4 | 16.7 | 17.1 | 16.1 | 16.4 | 16.5 | 16.8 | 17.2 |
| | 12H | 17.4 | 17.7 | 17.9 | 18.1 | 18.5 | 17.5 | 17.8 | 18.0 | 18.2 | 18.6 |
| 8H | 4H | 13.2 | 13.5 | 13.6 | 13.9 | 14.3 | 13.3 | 13.6 | 13.7 | 14.0 | 14.4 |
| | 6H | 15.7 | 16.0 | 16.2 | 16.4 | 16.8 | 15.7 | 16.0 | 16.2 | 16.4 | 16.9 |
| | 8H | 17.2 | 17.4 | 17.7 | 17.9 | 18.3 | 17.3 | 17.5 | 17.8 | 18.0 | 18.4 |
| | 12H | 18.9 | 19.1 | 19.4 | 19.5 | 20.0 | 19.0 | 19.2 | 19.5 | 19.6 | 20.1 |
| 12H | 4H | 13.4 | 13.7 | 13.9 | 14.1 | 14.5 | 13.5 | 13.8 | 14.0 | 14.2 | 14.6 |
| | 6H | 16.1 | 16.3 | 16.6 | 16.7 | 17.2 | 16.1 | 16.3 | 16.6 | 16.8 | 17.2 |
| | 8H | 17.7 | 17.8 | 18.2 | 18.3 | 18.8 | 17.7 | 17.9 | 18.2 | 18.4 | 18.9 |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H | +0.2 / -0.2 | | | | | +0.2 / -0.2 | | | | | |
| S = 1.5H | +0.3 / -0.3 | | | | | +0.3 / -0.3 | | | | | |
| S = 2.0H | +0.5 / -0.6 | | | | | +0.5 / -0.6 | | | | | |
| Standard table Correction Summand | --- | | | | | --- | | | | | |
| Corrected Glare Indices referring to 630lm Total Luminous Flux | | | | | | | | | | | |

Black Foster Custom System components

ARKOSLIGHT

Black Foster Custom System is a modular 48V lighting system designed to create tailored lighting setups by combining tracks, connectors, lighting modules, and accessories. Ideal for architectural and retail projects that demand flexibility, minimalist design, and high performance.

To configure the Black Foster Custom System, you'll need to combine the following components:

1. Tracks - Available in surfac, or suspended versions (using suspension accessories with the surface track), they form the structural and electrical base of the system.
2. Connectors & Power Supply - Join track sections and provide 48V power input.
3. Accessories - Including end caps, joining elements, mounting accessories, and alternative installation parts to secure and finish the system.



Track Options

Choose all the track components required for your project configuration.

| | |
|---|-----------------------|
| BLACK FOSTER Custom Surface 3.28ft (1m) UL | U452-01-00- NT WT |
| BLACK FOSTER Custom Surface 6.56ft (2m) UL | U452-02-00- NT WT |

| | |
|---|-----------------------|
| BLACK FOSTER Custom Surface L-Joint UL | U452-04-00- NT WT |
| BLACK FOSTER Custom Surface T-Joint UL | U452-05-00- NT WT |
| BLACK FOSTER Custom Surface X-Joint UL | U452-06-00- NT WT |

CUSTOM SURFACE PROFILE



L-JOINT



T-JOINT



X-JOINT



Complementary track accessories

Use end caps, joiners, and gap covers to connect, close, and cleanly finish your track setup.

| | |
|------------------------------------|---------------------|
| BLACK FOSTER Custom Surface | |
| End UL | U452-00-03- N W |

Cover thickness = 0.12in (3mm)



| | |
|------------------------------------|---------------------|
| BLACK FOSTER Custom Surface | |
| End Feed UL | U452-00-04- N W |

Cover thickness = 0.12in (3mm)



| | |
|------------------------------------|------------|
| BLACK FOSTER Custom Surface | |
| Straight Joiner UL | U452-00-05 |



| | |
|---|--|
| BLACK FOSTER Suspension Kit (2 Units) UL | |
| U450-00-09- NT WT | |

Suggested Mounting accessories quantities

- 3.28ft (1000mm) - 2 Pcs.
- 6.56ft (2000mm) - 3 Pcs.




| | |
|-----------------------------------|-----|
| Suspension Feed Kit 48V UL | |
| U338-00-17- N W | DIM |

*For remote power supply



| | | |
|---|-----------------|-----------------|
| BLACK FOSTER Custom Cover Gap 250 UL | U452-00-01- N | 9.48in / 250mm |
| BLACK FOSTER Custom Cover Gap 500 UL | U452-00-02- N | 16.69in / 500mm |



COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

Electrical connections are not included. Please choose the required components from the Connectors section.



Connector options

Connectors are required to provide electrical continuity between tracks, ensuring an uninterrupted 48V flow.

Live-End Connector 48V UL

U338-00-01- | N |



Central Connector 48V UL

U338-00-02- | N |



L-Joint Connector 48V UL

U338-00-12- | N |



T-Joint Connector 48V UL

U450-00-07- | N |



X-Joint Connector 48V UL

U450-00-08- | N |



Power Supply Options

Select the appropriate power feed to deliver 48V to the system based on your track layout and installation type.

| | P | V | D |
|--------------------------------------|------------|-----|--|
| Constant Voltage LED POWER SUPPLY | U100-00-78 | 96W | 48V 8.16 x 2.97 x 1.30 in 207 x 75.4 x 33 mm |

120 & 277V | 50/60 Hz

UL DROP
VOLTAGE TABLE

| | | CABLE LENGTH | | | |
|-------|---------------|--------------|---------|----------|---------|
| | | 16.40ft | 32.80ft | 65.62ft | 98.43ft |
| | | 5m | 10m | 20m | 30m |
| POWER | CABLE SECTION | TRACK LENGTH | | | |
| 96 W | AWG16 | 164ft | 164ft | 131.32ft | 82ft |
| | | 50m | 50m | 40m | 25m |

Connection diagrams:

Surface



Suspension



COLOUR | N ■ RAL 9005 | W □ RAL 9016 |